

COMPACTION RANGE

# ZEN-L

## Single-direction vibratory plates



The new ZEN-L range offers a wide variety of single-direction vibratory plates. Their compact design allows for compaction of asphalt and light mixed soils, in the narrowest of spaces like extremely narrow trenches, as well as for the vibration of interlocking paving stones.



- Wheel kit and 9-liter water tank (W models) come as option
- 350mm and 500mm wide plates available
- Vibration frequency: 5,800 vib/min



Handles available to be attached at the red holes.

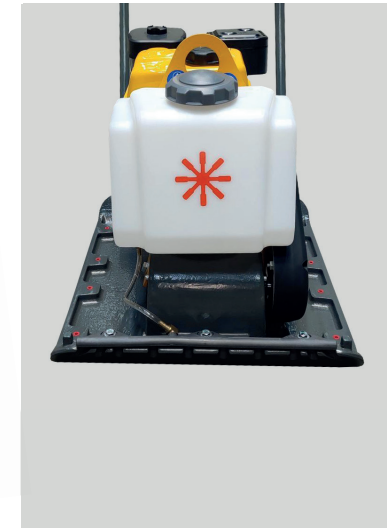

**+**  
**Air filter**

Cyclonic 3 stage air-filtration system that ensures an efficient operation and prolongs the engine's lifespan.



**+**  
**Robust and resistant**

Tough ductile iron baseplate is extremely durable even under extreme conditions and provides long service life.



**+**  
**Low hand-arm vibrations**

The guide handle with vibration damping means longer working hours and less fatigue for the operator.



**+**  
**Ergonomics and comfort**

Ergonomically designed lifting handles make loading and unloading from transport vehicles easier for the operator.

### Technical Data

MODEL	Centrifugal force (kN)	Water tank (L)	Weight without fuel (kg)	Vibration speed (v.p.m.)	Dimensions (Wide x Long x High)	Engine	Water tank
ZEN-L 12	12	-	63	5,800	350x520x820	ENAR G210 FA Petrol 4.4 kW	No
ZEN-L 12 W	12	9	65	5,800	350x520x820		Yes
ZEN-L 15	15	-	83	5,800	500x588x940		No
ZEN-L 15 W	15	9	85	5,800	500x588x940		Yes
ZEN-L 20	20	-	90	5,800	500x588x940		No
ZEN-L 20 W	20	9	92	5,800	500x588x940		Yes
ZEN 12 GH	12	-	63	5,800	350x520x820	HONDA GX160 Petrol 4 kW	No
ZEN 12 GH W	12	9	65	5,800	350x520x820		Yes
ZEN 15 GH	15	-	83	5,800	500x588x940		No
ZEN 15 GH W	15	9	85	5,800	500x588x940		Yes
ZEN 20 GH	20	-	90	5,800	500x588x940		No
ZEN 20 GH W	20	9	92	5,800	500x588x940		Yes